


- Tipla se koristi sa vijcima DTS 516 S, DTS 516 U, DTS 516 UD



L	D	S	U
		Ø 4,8	Ø 6,1
35		o	o
60		o	o
85		o	o
95		o	o
105		o	o
115		o	o
135		o	o
145		o	o
165		o	o
185		o	o
215		o	o
235		o	o
285		o	o
325		o	o
385		o	o
435		o	o
535		o	o

IZOLACIJA	METAL	DRVO	BETON
	L ₁	L ₁	L ₁
50-70	50-70	80	55-85
80-100	60-80	80	65-85
110	60	80	65
120	60	80	65
130	60	80	65
140-150	70	80	85
160	60	80	65
170-180	60-70	80	65-85
190-200	60-70	80	65-85
210-230	60-80	80	85
240-250	60-70	80	65-85
260	60	80	65
300	50	80	55
350	60	80	65
410	60	80	65
460	60	80	65
560	60	80	65

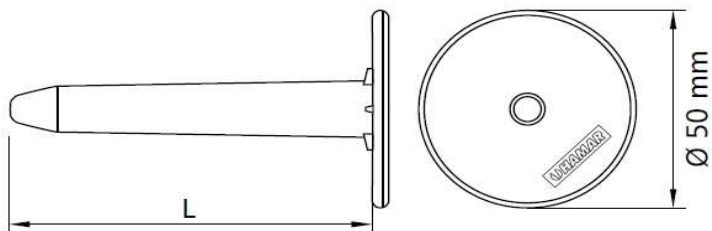