


DTS 516 U

Samourezni vijak sa torx glavom T25 za beton


PROTECT 1000™

- Za pričvršćenje podne izolacije na ravnim krovovima;

- Koristi se sa teleskopskom izolacijskom tiplom DTS 515 U

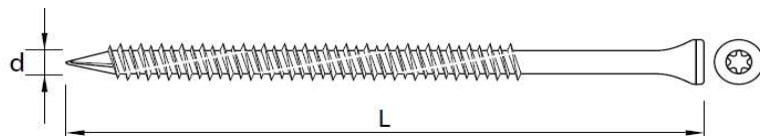

| L | D | Ø6,1 |
|-----|---|------|
| 55 | ○ | |
| 65 | ○ | |
| 85 | ○ | |
| 100 | ○ | |
| 120 | ○ | |
| 150 | ○ | |
| 180 | ○ | |
| 200 | ○ | |
| 220 | ○ | |
| 250 | ○ | |
| 300 | ○ | |

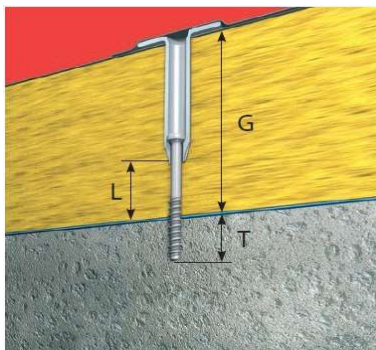

| Insulation thickness | DTS 515 | Steel substrate S280GD | Wooden substrate ≥ C24 | | Concrete substrate ≥ C20/25 | |
|----------------------|---------|------------------------|------------------------|---------------------------|-----------------------------|---------------------------|
| | | DTS 516 S | Screw length | Effective embedment depth | DTS 516 U | Effective embedment depth |
| G (mm) | L (mm) | L ₁ (mm) | L ₁ (mm) | h _{ef} (mm) | L ₁ (mm) | h _{ef} (mm) |
| Round type | | | | | | |
| 50 | 35 | 50 | 80 | 20 | 55 | 30 |
| 60 | 35 | 60 | | | | |
| 70 | 35 | 70 | | | | |
| 80 | 60 | 60 | | | | |
| 90 | 60 | 70 | | | | |
| 100 | 60 | 80 | | | | |
| 110 | 85 | 60 | | | | |
| 120 | 95 | 60 | | | | |
| 130 | 105 | 60 | | | | |
| 140 | 115 | 60 | | | | |
| 150 | 115 | 70 | | | | |
| 160 | 135 | 60 | | | | |
| 170 | 145 | 60 | | | | |
| 180 | 145 | 70 | | | | |
| 190 | 165 | 60 | | | | |
| 200 | 165 | 70 | | | | |
| 210 | 185 | 60 | | | | |
| 220 | 185 | 70 | | | | |
| 230 | 185 | 80 | | | | |
| 240 | 215 | 60 | | | | |
| 250 | 215 | 70 | | | | |
| 260 | 235 | 60 | | | | |
| 300 | 285 | 50 | | | | |
| 350 | 325 | 60 | | | | |
| 410 | 385 | 60 | | | | |
| 460 | 435 | 60 | | | | |
| 560 | 535 | 60 | | | | |
| Oval type | | | | | | |
| 80 | 65 | 50 | 80 | 20 | - | - |
| 100 | 65 | 70 | 100 | | | |
| 120 | 65 | 100 | - | | | |
| 150 | 65 | 120 | - | | | |

